

Smart Fiber Amplifier Units  
E3NX-FA

# Highly Stable Detection

Easy Setup for Any Workpiece by Any Operator



IO-Link  
EtherCAT®  
CompoNet™  
CC-Link V2

# Excellent basic performance for Even More Applications


## Basic performance

1.5 Times the Sensing Distance <sup>*1</sup>	1/10th the Minimum Sensing Object <sup>*1</sup>
<b>6 m</b> For E32-LT11 Fiber Unit with a fiber length of 3.5 m	<b>0.3 μm dia.</b> Typical example of actual measurements with E32-D11R Fiber Unit

## Three Technologies That Support High Performance

### Optical Coupling Efficiency of 40%

The lens and reflector eliminate lost light to emit powerful, uniform emission.

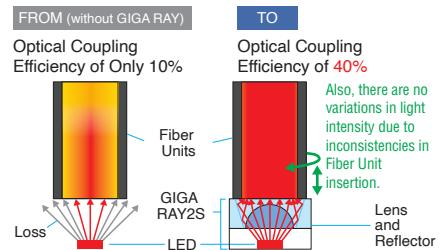


### Low Noise to Accurately Capture Signals

#### LIGHT RECEPTION ALGORITHM Smart Noise Reduction

#### Signal-to-Noise Ratio Improved 2.5 Times

The influences of noise are reduced to achieve stable incident light levels by increasing the number of samples taken. This increases the margin for threshold values to achieve stable detection.

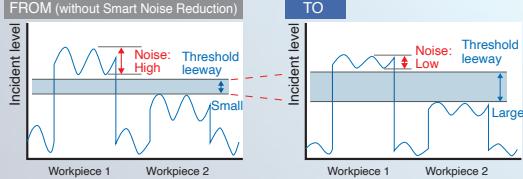

### High Power to Achieve Stable Detection

#### HIGH-EFFICIENCY COUPLING ELEMENT<sup>\*2</sup> **GIGA RAY2S**



### High-speed, High-precision Signal Processing


#### HIGH-SPEED, HIGH-PRECISION IC **N-Core**

Twice the Processing Speed<sup>\*3</sup>

#### Point

#### Response Time of 30 μs in High-speed Mode<sup>\*4</sup>

You can adjust the light intensity to detect fast-moving workpieces more accurately.\*2

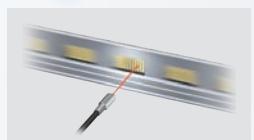

\*1. Compared with E3X-HD. \*2. Infrared models (E3NX-FAH) are not equipped with GIGA RAY2S. \*3. Compared with E3X-HD for normal operation processing.

\*4. Model with 1 output: 30 μs, model with 2 outputs: 32 μs. \*5. Patent pending" and "Patented" refer to patent status in Japan (as of November 2025).

Ultra-easy



# Easily Handle a Wide Range of Applications with the Press of a Single Button

Consistent Settings for All Users **Smart Tuning Settings** Patented \*5



Automatic Adjustment to Optimum Incident Level

## Wide Light Intensity Adjustment Range from Transparent Objects to Black Workpieces

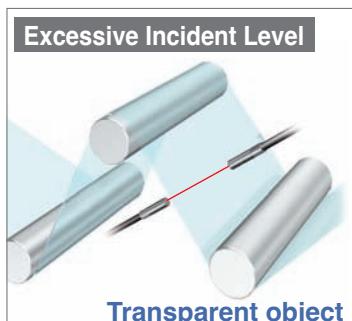

Wider light intensity adjustment range of 40,000 times (Conventional models\*2: 2,000 times)  
You can automatically adjust the light intensity to an optimum value for stable detection even  
with saturated or insufficient incident light.

\*2. E3X-HD


## New Features

# New Ways to Use Fiber Sensors with IO-Link

Detect Changes from Stable Operation **Smart Verification** Patented \*1


### Operation

Detect Parameter Changes and Unintended Operations, Output Alarms. Abnormalities can be detected immediately.

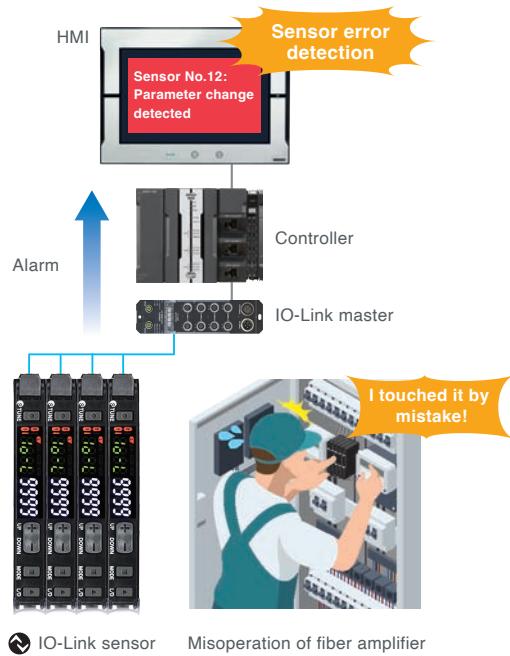


### Maintenance/Inspection

With one command, you can check fiber amplifier changes and pinpoint the cause of abnormalities.

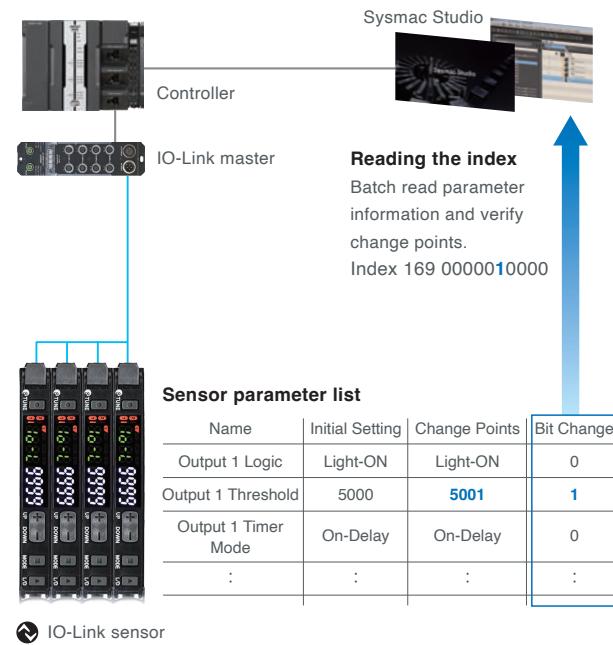


### IO-Link for batch parameter setup and Incident light level retrieval

Parameter settings that were previously done manually can now be batch-configured via IO-Link, reducing setup work.

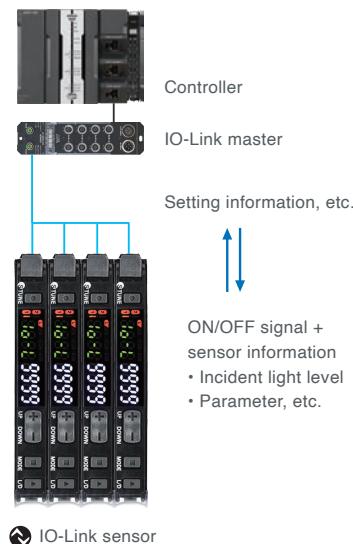

### Sensor pairing at a glance **Find Me**

When configured on the amplifier or via IO-Link, the fiber unit's emitter blinks, making it easy to identify which fiber unit is connected to the amplifier.

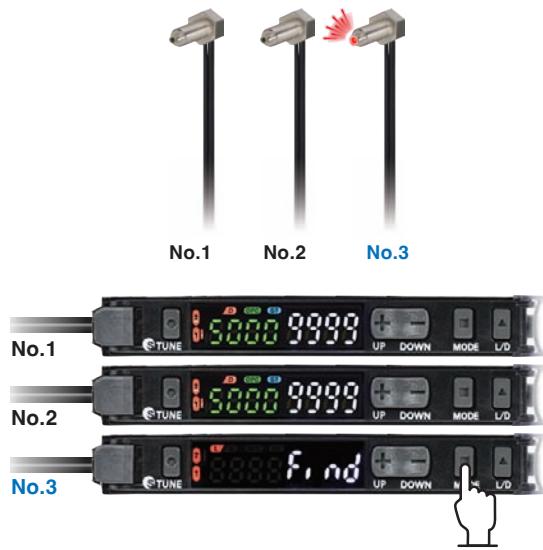

Ultra-reliable

## Two Decision Support Functions to Help You

Detect Changes from Stable Operation

Smart Verification

Patented \*1

50 4649

Passing time Difference in incident level

### Selecting Fiber Units

Just about anyone can make a quantitative decision without special skills.



Passing time Difference in incident level




Passing time Difference in incident level

The difference in incident level is large, so use B.

### Setting Optimum Thresholds and Modes

You can see the passing time and difference in incident levels to facilitate manual setup.

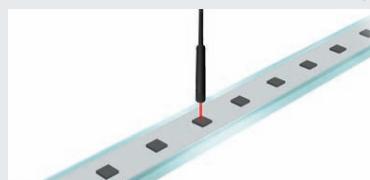

13 4000

Passing time Difference in incident level

The passing time is "13 ms", so it is OK with Standard Mode.

13 4000

Passing time Difference in incident level


The incident light level difference is 4,000 when the level is 5,000 with a workpiece, so a threshold of 3,000 is OK.

Visual Information for Fast Workpieces

Change Finder

Patented \*1

You can confirm changes in displayed values for fast workpieces to accurately set the threshold.

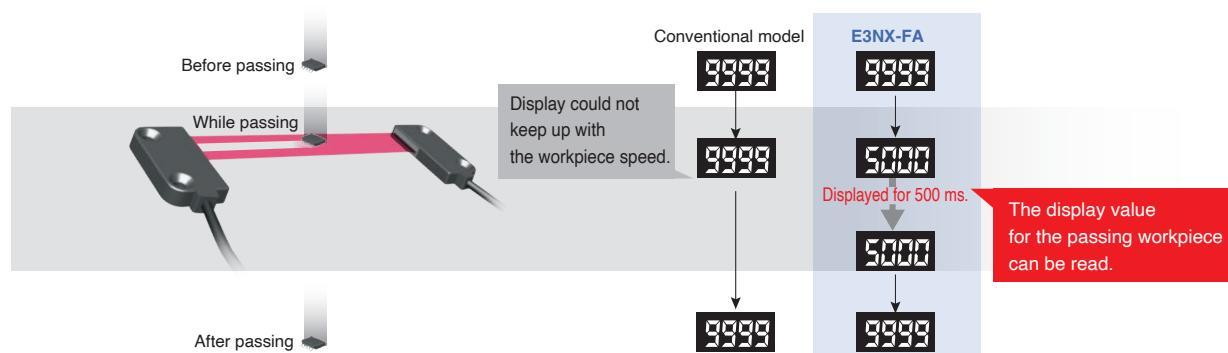

Point



Advanced DPC (Dynamic Power Control)

Patented \*1

Incident level

### Predictive Maintenance to Reduce Downtime

An alarm output\*2 has been added to the DPC that automatically compensates differences in the incident level. A maintenance signal is output when the incident level drops due to dirt or vibration for use in predictive maintenance. (We recommend DPC for through-beam or retro-reflective models.)

\*2 An alarm output is supported only on models with two outputs.


Target value

Compensation limit value

Threshold

Display flashes and alarm is output.

Time

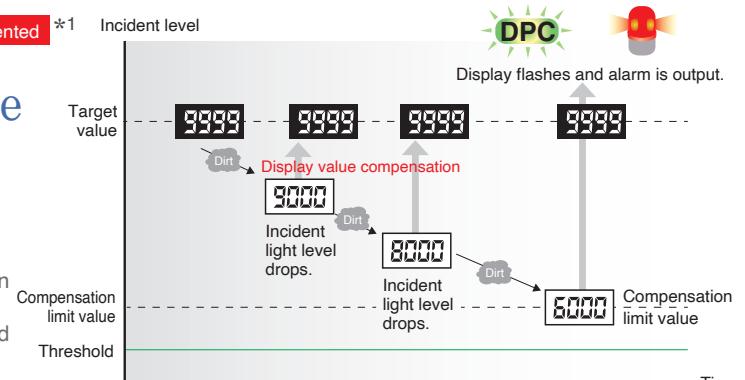

The IoT platform that enables you to see, complete a lineup, and deliver


Winner of the  
Good Design Award



## Common Features and Models in the N-Smart Series

### Common Buttons

Intuitive Operation and Easy Setup.

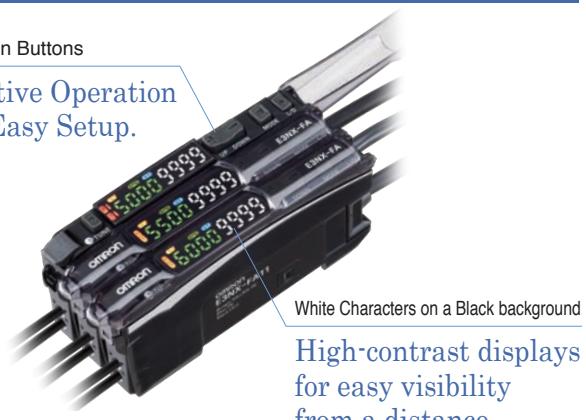

Models with Wire-saving Connectors Popular

## No Master/Slave Distinctions in Amplifier Units

### • Reduce model numbers in stock


You do not need to stock both master and slave amplifier units.

### • Greatly reduced wiring work

Power is supplied from the Master Connector. Slave Connectors have only output lines.

### • Expansion is easy and reliable

Mutual interference prevention works even if you use a Master Connector instead of a Slave Connector or combine them with pre-wired models.

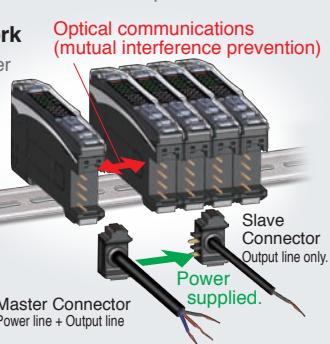

## Model for Sensor Communications Unit

## Data Management and Time Reduction with Network Communications

- Three communications methods are supported
- Use Distributed Sensor Units to reduce equipment production costs and commissioning time



E3NW Cat. No. E428

EtherCAT  
CompoNet  
CC-Link V2

## Model for Sensor Communications Unit (With wired output)

## Offers Both Network Communications and High-speed Response

### • Communications model with a wired output

Network communications can be used for an application that requires a high-speed response.

### • Greatly reduced wiring work

Power is supplied from the E3NW Sensor Communications Units.



## IO-Link Master Unit GD Series

# Combine with various sensors easily

With GD series, connecting to devices from other manufacturers is effortless.



Discover

Omron IO-Link  
in 3 Minutes

Use sensor data seamlessly with PLCs from different manufacturers



EtherNet/IP



EtherCAT®



CC-Link IE TSN

CC-Link IE Field

CC-Link IE Field Basic

Just connect and go

Instantly see  
sensor status

Configure easily  
from your PC



IO-Link Master Unit  
GD Series



Support Software  
Wave Inspire HUB

IO-Link

Automatically connect to over 100 IO-Link devices.



Omron devices

Devices from other  
manufacturers

\*1. These will be supported in a future version upgrade.

## MEMO

# Smart Fiber Amplifier Units

## E3NX-FA



### A Smart Fiber Amplifier Unit with Ultra-stable Detection and Ultra-easy Setup

- Improved basic performance with 1.5 times the sensing distance and approx. 1/10th the minimum sensing object.\*1
- Ultra-easy setup with Smart Tuning with a light intensity adjustment range expanded 20 times to 40,000:1. Optimum stable detection achieved with light intensity adjustment even for saturated incident light.
- White on black display characters for high visibility.
- Solution Viewer that shows the passing time and difference in incident levels and Change Finder that allows you to see display values even for fast workpieces.
- Added IO-Link type to the lineup.
- Equipped with Smart Verification \*2, which can output alarms for changes in set parameters or unintended erroneous operations.

\*1. Compared to the E3X-HD.

\*2. Advanced function IO-Link only.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

 Refer to the Safety Precautions on page 28.

### Ordering Information

#### Fiber Amplifier Units (Dimensions → pages 30 and 31)

Type	Connecting method	Appearance	Inputs/outputs	Model	
				NPN output	PNP output
Standard models	Pre-wired (2 m)		1 output	E3NX-FA11 2M	E3NX-FA41 2M
	Wire-saving Connector			E3NX-FA11-5 2M *1	---
Advanced models	Pre-wired (2 m)		2 outputs + 1 input	E3NX-FA21 2M	E3NX-FA51 2M
	Wire-saving Connector		IO-Link + Inputs/outputs	---	E3NX-FA51-IL3 2M
			1 output + 1 input	E3NX-FA7	E3NX-FA9
			2 outputs	E3NX-FA7TW	E3NX-FA9TW
	M8 Connector		1 output + 1 input	E3NX-FA24	E3NX-FA54
			2 outputs	---	E3NX-FA54TW
			IO-Link + Inputs/outputs	---	E3NX-FA54-IL3

\*1. This type can prevent mutual interference for two units in the SHS2 mode.

Type	Connecting method	Appearance	Inputs/outputs	Model	
				NPN output	PNP output
Infrared models	Pre-wired (2 m)		1 output	E3NX-FAH11 2M	E3NX-FAH41 2M
	Wire-saving Connector		1 output	E3NX-FAH6	E3NX-FAH8
Analog output models	Pre-wired (2 m)		2 outputs	E3NX-FA11AN 2M	E3NX-FA41AN 2M
Model for Sensor Communications Unit *2	Connector for Sensor Communications Unit		---	E3NX-FA0	
				E3NX-FAH0	
	Connector for Sensor Communications Unit Pre-wired (2 m)		1 output	E3NX-FA10 2M	E3NX-FA40 2M

\*2. A Sensor Communications Unit is required if you want to use the Fiber Amplifier Unit on a network.

## Accessories (Sold Separately)

**Wire-saving Connectors (Required for models for Wire-saving Connectors.) (Dimensions → page 32)**

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. Note: Protective stickers are provided.

Type	Appearance	Cable length	No. of conductors	Model	Applicable Fiber Amplifier Units
Master Connector		2 m	4	E3X-CN21	E3NX-FA7 E3NX-FA7TW E3NX-FA9 E3NX-FA9TW
Slave Connector			2	E3X-CN22	
Master Connector		2 m	3	E3X-CN11	E3NX-FA6 E3NX-FA8 E3NX-FAH6 E3NX-FAH8
Slave Connector			1	E3X-CN12	

**Sensor I/O Connectors (Required for models for M8 Connectors.) (Dimensions → page 32)**

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately.

Size	Cable	Appearance	Cable type	Model
M8	Standard cable	Straight	2m	XS3F-M421-402-A
			5m	
		L-shaped	2m	XS3F-M421-405-A
			5m	XS3F-M422-402-A
				XS3F-M422-405-A

**Mounting Bracket (Dimensions → page 33)**

A Mounting Bracket is not provided with the Fiber Amplifier Unit. It must be ordered separately as required.

Appearance	Model	Quantity
	E39-L143	1

**DIN Track (Dimensions → page 33)**

A DIN Track is not provided with the Fiber Amplifier Unit. It must be ordered separately as required.

Appearance	Type	Model	Quantity
	Shallow type, total length: 1 m	PFP-100N	1
	Shallow type, total length: 0.5 m	PFP-50N	
	Deep type, total length: 1 m	PFP-100N2	

**End Plate (Dimensions → page 33)**

Two End Plates are provided with the Sensor Communications Unit. End Plates are not provided with the Fiber Amplifier Unit. They must be ordered separately as required.

Appearance	Model	Quantity
	PFP-M	1

**Cover**

Attach these Covers to Amplifier Units.

Order a Cover when required, e.g., if you lose the covers.

Appearance	Model	Quantity
	E39-G25 FOR E3NX-FA	1

**Related Products****Sensor Communications Units**

Type	Appearance	Model
Sensor Communications Unit for EtherCAT		E3NW-ECT
Sensor Communications Unit for CompoNet		E3NW-CRT *1
Sensor Communications Unit for CC-Link		E3NW-CCL
Distributed Sensor Unit *2		E3NW-DS

Refer to your OMRON website for details.

\*1. E3NX-FAH0 can not be connected.

\*2. The Distributed Sensor Unit can be connected to any of the Sensor Communications Units.

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA.

CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

## Ratings and Specifications

## Standard models/ Advanced models

Item	Type	Standard			Advanced				
		NPN output	E3NX-FA11	E3NX-FA6	E3NX-FA11-5*1	E3NX-FA21	E3NX-FA7	E3NX-FA7TW	E3NX-FA24
		PNP output	E3NX-FA41	E3NX-FA8	---	E3NX-FA51	E3NX-FA9	E3NX-FA9TW	E3NX-FA54
Inputs/outputs	Connecting method	Pre-wired	Wire-saving Connector	Pre-wired	Pre-wired	Wire-saving Connector		M8 Connector	
	Outputs	1 output			2 outputs	1 output	2 outputs	1 output	2 outputs
External inputs		---			1 input	1 input	---	1 input	---
Light source (wavelength)		Red, 4-element LED (625 nm)							
Power supply voltage		10 to 30 VDC, including ripple (p-p) 10%							
Power consumption *2		<p>At Power supply voltage of 24 VDC Standard Models: Normal mode : 840 mW max. (Current consumption at 35 mA max.) Eco function ON: 650 mW max. (Current consumption at 27 mA max.) Eco function LO : 750 mW max. (Current consumption at 31 mA max.)</p> <p>Advanced Models or Model for Sensor Communications Unit: Normal mode : 920 mW max. (Current consumption at 38 mA max.) Eco function ON: 680 mW max. (Current consumption at 28 mA max.) Eco function LO : 800 mW max. (Current consumption at 33 mA max.)</p>							
Control output		<p>Load power supply voltage: 30 VDC max., open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max.</p> <p>(Residual voltage: At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max.)</p> <p>OFF current: 0.1 mA max.</p>							
External inputs		---			Refer to *3.	---	Refer to *3.	---	---
Indicators		<p>7-segment displays (Sub digital display: green, Main digital display: white) Display direction: Switchable between normal and reversed. OUT indicator (orange), L/D indicator (orange), ST indicator (blue), DPC indicator (green), and OUT selection indicator (orange, only on models with 2 outputs)</p>							
Protection circuits		Power supply reverse polarity protection, output short-circuit protection, and output reverse polarity protection							
Response time	Super-high-speed mode (SHS)	Operate or reset for model with 1 output: 30 µs (Super High Speed mode (SHS2) of E3NX-FA11-5 is 60 µs each), with 2 outputs: 32 µs							
	High-speed mode (HS)	Operate or reset: 250 µs							
	Standard mode (Stnd)	Operate or reset: 1 ms							
	Giga-power mode (GIGA)	Operate or reset: 16 ms							
Sensitivity adjustment		Smart Tuning (2-point tuning, full auto tuning, position tuning, maximum sensitivity tuning, power tuning, or percentage tuning (-99% to 99%) or manual adjustment							
Maximum connectable Units		30							
No. of Units for mutual interference prevention *4	Super-high-speed mode (SHS)	0 <b>Note:</b> 2 units when the detection mode is set to Super High Speed mode (SHS2), and for other models, the mutual interference prevention function is disabled.							
	High-speed mode (HS)	10							
	Standard mode (Stnd)	10							
	Giga-power mode (GIGA)	10							

\*1. This type can prevent mutual interference for two units in the SHS2 mode.

\*2. At Power supply voltage of 10 to 30 VDC

Standard Models:

Normal mode : 990 mW max. (Current consumption: 33 mA max. at 30 VDC, 65 mA max. at 10 VDC)  
Eco function ON : 780 mW max. (Current consumption: 26 mA max. at 30 VDC, 42 mA max. at 10 VDC)  
Eco function LO : 840 mW max. (Current consumption: 28 mA max. at 30 VDC, 45 mA max. at 10 VDC)

Advanced Models:

Normal mode : 1,020 mW max. (Current consumption: 34 mA max. at 30 VDC, 67 mA max. at 10 VDC)  
Eco function ON : 810 mW max. (Current consumption: 27 mA max. at 30 VDC, 44 mA max. at 10 VDC)  
Eco function LO : 870 mW max. (Current consumption: 29 mA max. at 30 VDC, 48 mA max. at 10 VDC)

\*3. The following details apply to the input.

	Contact input (relay or switch)	Non-contact input (transistor)	Input time *3-1
NPN	ON: Shorted to 0 V (Sourcing current: 1 mA max.). OFF: Open or shorted to Vcc.	ON: 1.5 V max. (Sourcing current: 1 mA max.). OFF: Vcc – 1.5 V to Vcc (Leakage current: 0.1 mA max.)	ON: 9 ms min. OFF: 20 ms min.
	ON: Shorted to Vcc (Sinking current: 3 mA max.). OFF: Open or shorted to 0 V.	ON: Vcc – 1.5 V to Vcc (Sinking current: 3 mA max.). OFF: 1.5 V max. (Leakage current: 0.1 mA max.)	

\*3-1. Input time is 25 ms (ON)/(OFF) only when (in tUnE) or (in PtUn) input is selected.

\*4. The tuning will not change the number of units. The least unit count among the mutual interference prevention units of E3NX and E3NC.

Check the mutual interference prevention unit count and response speed of each model.

Item	Type	Standard			Advanced								
	NPN output	E3NX-FA11	E3NX-FA6	E3NX-FA11-5*1	E3NX-FA21	E3NX-FA7	E3NX-FA7TW	E3NX-FA24	---				
	PNP output	E3NX-FA41	E3NX-FA8	---	E3NX-FA51	E3NX-FA9	E3NX-FA9TW	E3NX-FA54	E3NX-FA54TW				
Item	Connecting method	Pre-wired	Wire-saving Connector	Pre-wired	Pre-wired	Wire-saving Connector	M8 Connector						
Functions	Automatic power control (APC)	Always enabled.											
	Dynamic power control (DPC)	Provided											
	Timer	Select from timer disabled, OFF-delay, ON-delay, one-shot, or ON-delay + OFF-delay timer: 1 to 9,999 ms											
	Zero reset	Negative values can be displayed. (Threshold value is shifted.)											
	Resetting settings *5	Select from initial reset (factory defaults) or user reset (saved settings).											
	Eco mode	Select from OFF (digital display lit), Eco ON (digital display not lit), and Eco LO (digital display dimmed).											
	Bank switching	Select from banks 1 to 4.											
	Power tuning	Select from ON, OFF or Execution on power-up.											
	Output 1	Select from normal detection mode, area detection mode or differential detection mode.											
Functions	Output 2	---			Select from normal detection mode, alarm output mode, error output mode or differential detection mode.	---	Select from normal detection mode, alarm output mode, error output mode or differential detection mode.	---	Select from normal detection mode, alarm output mode, error output mode or differential detection mode.				
	External input	---			Select from input OFF, tuning, power tuning, emission OFF, Sensor OFF, zero reset, or bank switching.	---	Select from input OFF, tuning, power tuning, emission OFF, Sensor OFF, zero reset, or bank switching.	---					
Ambient conditions	Hysteresis width	Select from standard setting or user setting. For a user setting, the hysteresis width can be set from 0 to 9,999.											
	Ambient illumination (Receiver side)	Incandescent lamp: 20,000 lx max., Sunlight: 30,000 lx max.											
	Ambient temperature range *6	Operating: Groups of 1 or 2 Amplifier Units: -25 to 55°C, Groups of 3 to 10 Amplifier Units: -25 to 50°C, Groups of 11 to 16 Amplifier Units: -25 to 45°C, Groups of 17 to 30 Amplifier Units: -25 to 40°C Storage: -30 to 70°C (with no icing or condensation)											
	Ambient humidity range	Operating and storage: 35 to 85% (with no condensation) within the surrounding air temperature range shown above											
	Altitude	2,000 m max.											
	Installation environment	Pollution degree 3 (as per IEC60947-1)											
	Insulation resistance	20 MΩ min. (at 500 VDC)											
	Dielectric strength	1,000 VAC at 50/60 Hz for 1 min											
	Vibration resistance (destruction)	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions											
Materials	Shock resistance (destruction)	500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions											
	Weight (packed state/Sensor only)	Approx. 115 g/ approx. 75 g	Approx. 60g/ approx. 20g	Approx. 115 g/ approx. 75 g	Approx. 115 g/ approx. 75 g	Approx. 60g/approx. 20g		Approx. 65 g/approx. 25 g					
	Case	Polycarbonate (PC)											
Materials	Cover	Polycarbonate (PC)											
	Cable	PVC											
MTTF <sub>D</sub> (Year) *7		230	220	220	210	110	210	220	210				
Accessories		Instruction Manual											

\*5. The bank is not reset by the user reset function or saved by the user save function.

\*6. When the number of connected units is 11 or more, the ambient temperature is less than 50°C.

\*7. The MTTF<sub>D</sub> value is for reference only and does not guarantee product lifetime. It is calculated as MTTF<sub>D</sub> = MTTF × 2.

## Advanced function IO-Link models/ Infrared models

Item	Type	Advanced function IO-Link		Infrared			
	NPN output	---	---	E3NX-FAH11	E3NX-FAH6		
	PNP output	E3NX-FA51-IL3	E3NX-FA54-IL3	E3NX-FAH41	E3NX-FAH8		
Inputs/outputs	Connecting method	Pre-wired	M8 Connector	Pre-wired	Wire-saving Connector		
	Outputs	2 outputs		1 output			
Light source (wavelength)	External inputs	1 input (switchable with output 2)		---			
	Power supply voltage	Red, 4-element LED (625 nm)		Infrared LED (870 nm)			
Power consumption *1		At Power supply voltage of 24 VDC Advanced function IO-Link models: Normal mode : 780 mW max. (Current consumption at 32 mA max.) Eco function ON : 580 mW max. (Current consumption at 24 mA max.), Eco function LO : 680 mW max. (Current consumption at 28 mA max.)  Infrared models: Normal mode : 1080 mW max. (Current consumption at 45 mA max.) Eco function ON: 920 mW max. (Current consumption at 38 mA max.), Eco function LO : 1020 mW max. (Current consumption at 42 mA max.)					
Control output		Load power supply voltage: 30 VDC max. (Class 2), open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max.  ( Residual voltage: At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max. )  OFF current: 0.1 mA max.		Load power supply voltage: 30 VDC max., open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max.  ( Residual voltage: At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max. )  OFF current: 0.1 mA max.			
External inputs		Refer to *2.		---			
Indicators		7-segment displays (Sub digital display: green, Main digital display: white) Display direction: Switchable between normal and reversed. OUT indicator (orange), L/D indicator (orange), ST indicator (blue), DPC indicator (green), and OUT selection indicator (orange, only on models with 2 outputs)					
Protection circuits		Power supply reverse polarity protection, output short-circuit protection, and output reverse polarity protection					
Response time	Super-high-speed mode (SHS)	Operate or reset: 50 $\mu$ s <b>Note:</b> 1. When the SHS mode is set, the output 1 mode is the area detection mode, and P-b/PEAK/CFdr cannot be used. 2. When the SHS mode is set, the response will be at 50 $\mu$ s normally, but the high-speed repeated response will be at 170 $\mu$ s minimum.		Operate or reset: 30 $\mu$ s			
	High-speed mode (HS)	Operate or reset: 250 $\mu$ s					
	Standard mode (Stnd)	Operate or reset: 1 ms					
	Giga-power mode (GIGA)	Operate or reset: 16 ms					
Sensitivity adjustment		Smart Tuning (2-point tuning, full auto tuning, position tuning, maximum sensitivity tuning, power tuning, or percentage tuning (-99% to 99%)) or manual adjustment					
Maximum connectable Units		30					
No. of Units for mutual interference prevention *3	Super-high-speed mode (SHS)	0					
	High-speed mode (HS)	10					
	Standard mode (Stnd)	10					
	Giga-power mode (GIGA)	10					

\*1. At Power supply voltage of 10 to 30 VDC

Advanced function IO-Link models:

Normal mode : 780 mW max. (Current consumption: 26 mA max. at 30 VDC, 62 mA max. at 10 VDC)  
 Eco function ON : 580 mW max. (Current consumption: 20 mA max. at 30 VDC, 39 mA max. at 10 VDC)  
 Eco function LO : 680 mW max. (Current consumption: 23 mA max. at 30 VDC, 42 mA max. at 10 VDC)

Infrared models:

Normal mode : 1,260 mW max. (Current consumption: 42 mA max. at 30 VDC, 80 mA max. at 10 VDC)  
 Eco function ON : 1,050 mW max. (Current consumption: 35 mA max. at 30 VDC, 60 mA max. at 10 VDC)  
 Eco function LO : 1,140 mW max. (Current consumption: 38 mA max. at 30 VDC, 70 mA max. at 10 VDC)

\*2. The following details apply to the input.

	Contact input (relay or switch)	Non-contact input (transistor)	Input time *2-1
PNP	ON: Shorted to Vcc (Sinking current: 3 mA max.). OFF: Open or shorted to 0 V.	ON: Vcc – 1.5 V to Vcc (Sinking current: 3 mA max.) OFF: 1.5 V max. (Leakage current: 0.1 mA max.)	ON: 9 ms min. OFF: 20 ms min.

\*2-1. Input time is 25 ms (ON)/(OFF) only when (in tUnE) or (in PtUn) input is selected.

\*3. The tuning will not change the number of units. The least unit count among the mutual interference prevention units of E3NX and E3NC. Check the mutual interference prevention unit count and response speed of each model.

Item	Type	Advanced function IO-Link		Infrared					
	NPN output	---	---	E3NX-FAH11	E3NX-FAH6				
	PNP output	E3NX-FA51-IL3	E3NX-FA54-IL3	E3NX-FAH41	E3NX-FAH8				
Item	Connecting method	Pre-wired	M8 Connector	Pre-wired	Wire-saving Connector				
Functions	Automatic power control (APC)	Always enabled.							
	Dynamic power control (DPC)	Provided							
	Timer	Select from timer disabled, OFF-delay, ON-delay, one-shot, or ON-delay + OFF-delay timer: 1 to 9,999 ms							
	Zero reset	Negative values can be displayed. (Threshold value is shifted.)							
	Resetting settings	Initial reset (factory defaults).		Select from initial reset (factory defaults) or user reset (saved settings). *4					
	Eco mode	Select from OFF (digital display lit), Eco ON (digital display not lit), and Eco LO (digital display dimmed).							
	Bank switching	---		Select from banks 1 to 4.					
	Power tuning	Select from ON or OFF.							
	Output 1	Select from normal detection mode, area detection mode, differential detection mode or deactivated.		Select from normal detection mode or area detection mode.					
	Output 2	Select from normal detection mode, alarm output mode, error output mode, differential detection mode, smart verification output mode or deactivated.		---					
Ambient illumination (Receiver side)	External input	Select from input OFF, tuning, power tuning, emission OFF, zero reset or smart verification.		---					
	Hysteresis width	Select from standard setting or user setting. For a user setting, the hysteresis width can be set from 0 to 9,999.							
Ambient temperature range *5	Smart Verification	Provided		---					
	Operating: Groups of 1 or 2 Amplifier Units: -25 to 55°C, Groups of 3 to 10 Amplifier Units: -25 to 50°C, Groups of 11 to 16 Amplifier Units: -25 to 45°C, Groups of 17 to 30 Amplifier Units: -25 to 40°C Storage: -30 to 70°C (with no icing or condensation)								
Ambient humidity range	Operating and storage: 35 to 85% (with no condensation) within the surrounding air temperature range shown above								
Altitude	2,000 m max.								
Installation environment	Pollution degree 3 (as per IEC60947-1)								
Insulation resistance	20 MΩ min. (at 500 VDC)								
Dielectric strength	1,000 VAC at 50/60 Hz for 1 min								
Vibration resistance (destruction)	10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions								
Shock resistance (destruction)	500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions								
Weight (packed state/Sensor only)	Approx. 115 g/approx. 75 g	Approx. 65 g/approx. 25 g	Approx. 115 g/approx. 75 g	Approx. 60 g/approx. 20 g					
Materials	Case	Polycarbonate (PC)							
	Cover	Polycarbonate (PC)							
	Cable	PVC							
IO-Link Communication specifications	IO-Link specification	Ver. 1.1		---					
	Baud rate	COM3: 230.4 kbps		---					
	Data length	PD size: 4 bytes		---					
	Minimum cycle time	1.1 ms		---					
MTTF <sub>D</sub> (Year) *6	210	200		360					
Accessories	Instruction Sheet and Index list			Instruction Sheet					

\*4. The bank is not reset by the user reset function or saved by the user save function.

\*5. When the number of connected units is 11 or more, the ambient temperature is less than 50°C.

\*6. The MTTF<sub>D</sub> value is for reference only and does not guarantee product lifetime. It is calculated as MTTF<sub>D</sub> = MTTF × 2.

## Analog output models/ Model for Sensor Communications Unit

Item		Type	Analog output		Sensor Communications Unit				
		NPN output	E3NX-FA11AN	E3NX-FA10	E3NX-FA0	E3NX-FAH0			
		PNP output	E3NX-FA41AN	E3NX-FA40					
Connecting method		Pre-wired	Connector for Sensor Communications Unit Pre-wired		Connector for Sensor Communications Unit				
Inputs/outputs	Outputs	2 outputs	1 outputs	--- *1					
	External inputs	---	---						
Light source (wavelength)		Red, 4-element LED (625 nm)			Infrared LED (870nm)				
Power supply voltage		10 to 30 VDC, including 10% ripple (p-p)	Supplied from the connector through the communication units.						
Power consumption *2		At Power supply voltage of 24 VDC Normal mode : 960 mW max. (Current consumption at 40 mA max.) Eco function ON: 770 mW max. (Current consumption at 32 mA max.) Eco function LO: 870 mW max. (Current consumption at 36 mA max.)	At Power supply voltage of 24 VDC Normal mode : 920 mW max. (Current consumption at 38 mA max.) Eco function ON: 680 mW max. (Current consumption at 26 mA max.) Eco function LO : 800 mW max. (Current consumption at 33 mA max.)			At Power supply voltage of 24 VDC Normal mode : 1,080 mW max. (Current consumption at 45 mA max.) Eco function ON: 920 mW max. (Current consumption at 38 mA max.) Eco function LO : 1,020 mW max. (Current consumption at 42 mA max.)			
Control output		Load power supply voltage: 30 VDC max., open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max. (Residual voltage: At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max. OFF current: 0.1 mA max.)	---						
Analog output (reference value)		Voltage output: 1-5 VDC (10 kΩ or more connected load), temperature characteristics: 0.3% F.S. / °C	---						
Indicators		7-segment displays (Sub digital display: green, Main digital display: white) Display direction: Switchable between normal and reversed. OUT indicator (orange), L/D indicator (orange), ST indicator (blue), DPC indicator (green), and OUT selection indicator (orange, only on models with 2 outputs)							
Protection circuits		Power supply reverse polarity protection, output short-circuit protection, and output reverse polarity protection		Power supply reverse polarity protection and output short-circuit protection					
Control output Response time	Super-high-speed mode (SHS)	Operate or reset: 80 µs	Operate or reset: 32 µs						
	High-speed mode (HS)	Operate or reset: 250 µs	Operate or reset: 250 µs						
	Standard mode (Stnd)	Operate or reset: 1 ms	Operate or reset: 1 ms						
	Giga-power mode (GIGA)	Operate or reset: 16 ms	Operate or reset: 16 ms						
Sensitivity adjustment		Smart Tuning (2-point tuning, full auto tuning, position tuning, maximum sensitivity tuning, power tuning, percentage tuning (-99% to 99%)) or manual adjustment							
Maximum connectable Units		30	16	With E3NW-ECT: 30 units (When connected to an OMRON NJ-series Controller.) With E3NW-CRT: 16 units (Note: E3NX-FAH0 can not be connected.) With E3NW-CCL: 16 units					
No. of Units for mutual interference prevention *3	Super-high-speed mode (SHS)	0 (The mutual interference prevention function is disabled if the detection mode is set to super-high-speed mode.)							
	High-speed mode (HS)	10							
	Standard mode (Stnd)	10							
	Giga-power mode (GIGA)	10							

\*1. Two sensor outputs are allocated in the programmable logic controller PLC I/O table.

PLC operation via Communications Unit enables reading detected values and changing settings.

\*2. At Power supply voltage of 10 to 30 VDC

Analog output models:

Normal mode : 1,080 mW max. (Current consumption: 36 mA max. at 30 VDC, 75 mA max. at 10 VDC)

Eco function ON : 840 mW max. (Current consumption: 28 mA max. at 30 VDC, 55 mA max. at 10 VDC)

Eco function LO : 960 mW max. (Current consumption: 32 mA max. at 30 VDC, 65 mA max. at 10 VDC)

\*3. The tuning will not change the number of units.

The least unit count among the mutual interference prevention units of E3NX and E3NC.

Check the mutual interference prevention unit count and response speed of each model.

Item	Type	Analog output		Sensor Communications Unit	
	NPN output	E3NX-FA11AN	E3NX-FA10	E3NX-FA0	E3NX-FAH0
	PNP output	E3NX-FA41AN	E3NX-FA40		
Connecting method		Pre-wired	Connector for Sensor Communications Unit Pre-wired	Connector for Sensor Communications Unit	
Functions	Automatic power control (APC)	Always enabled.			
	Dynamic power control (DPC)	Provided			
	Timer	Select from timer disabled, OFF-delay, ON-delay, one-shot, or ON-delay + OFF-delay timer: 1 to 9,999 ms			
	Zero reset	Negative values can be displayed. (Threshold value is shifted.)			
	Resetting settings *4	Select from initial reset (factory defaults) or user reset (saved settings).			
	Eco mode	Select from OFF (digital display lit), Eco ON (digital display not lit), and Eco LO (digital display dimmed).			
	Bank switching	Select from banks 1 to 4.			
	Sensor OFF setting	---		Select from ON or OFF.	---
	Power tuning	Select from ON or OFF.			
	Output 1	Select from normal detection mode, area detection mode or differential detection mode (E3NX-FA10/40 only).			
Ambient illumination (Receiver side)	Output 2	Select from Analog scaling or Analog offset.	---	Select from normal detection mode, alarm output mode, error output mode or differential detection mode (E3NX-FA0 only).	
	Hysteresis width	Select from standard setting or user setting. For a user setting, the hysteresis width can be set from 0 to 9,999.			
Ambient temperature range *5		Operating: Groups of 1 or 2 Amplifier Units: -25 to 55°C, Groups of 3 to 10 Amplifier Units: -25 to 50°C, Groups of 11 to 16 Amplifier Units: -25 to 45°C, Groups of 17 to 30 Amplifier Units: -25 to 40°C Storage: -30 to 70°C (with no icing or condensation)	Operating: Groups of 1 or 2 Amplifier Units: 0 to 55°C, Groups of 3 to 10 Amplifier Units: 0 to 50°C, Groups of 11 to 16 Amplifier Units: 0 to 45°C Storage: -30 to 70°C (with no icing or condensation)	Operating: Groups of 1 or 2 Amplifier Units: 0 to 55°C, Groups of 3 to 10 Amplifier Units: 0 to 50°C, Groups of 11 to 16 Amplifier Units: 0 to 45°C, Groups of 17 to 30 Amplifier Units: 0 to 40°C Storage: -30 to 70°C (with no icing or condensation)	
Ambient humidity range		Operating and storage: 35 to 85% (with no condensation) within the surrounding air temperature range shown above			
Altitude		2,000 m max.			
Installation environment		Pollution degree 3			
Insulation resistance		20 MΩ min. (at 500 VDC)			
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min			
Vibration resistance (destruction)		10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance (destruction)		500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions	150 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions		
Weight (packed state/Sensor only)		Approx. 115 g/approx. 75 g	Approx. 95 g/approx. 45 g	Approx. 65 g/approx. 25 g	Approx. 65 g/approx. 25 g
Materials	Case	Polycarbonate (PC)			
	Cover	Polycarbonate (PC)			
	Cable	PVC			
MTTF <sub>D</sub> (Year) *6		210		---	
Accessories		Instruction Manual			

\*4. The bank is not reset by the user reset function or saved by the user save function.

\*5. When the number of connected units is 11 or more, the ambient temperature is less than 50°C.

\*6. The MTTF<sub>D</sub> value is for reference only and does not guarantee product lifetime. It is calculated as MTTF<sub>D</sub> = MTTF × 2.

## Sensing Distances

**Standard models/ Advanced models/ Advanced function IO-Link models/  
Analog output models**

### Threaded Models

Sensing method	Sensing direction	Size	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Right-angle	M4	E32-T11N 2M	3,000	1,500	1,050	280
			E32-LT11N 2M	4,000 *1	4,000 *1	3,450	920
			E32-T11R 2M	3,000	1,500	1,050	280
	Straight	M4	E32-LT11 2M	4,000 *1	4,000 *1	4,000 *1	1,080
			E32-LT11R 2M	4,000 *1	4,000 *1	3,450	920
Reflective	Right-angle	M3	E32-C31N 2M	160	75	69	14
			E32-C21N 2M	440	190	130	39
		M4	E32-D21N 2M	1,260	520	360	100
		M6	E32-C11N 2M	1,170	520	480	100
			E32-LD11N 2M	1,260	520	360	100
	Straight	M3	E32-D21R 2M	210	90	60	16
			E32-C31 2M	490	220	150	44
			E32-C31M 1M				
		M4	E32-D211R 2M	210	90	60	16
			E32-D11R 2M	1,260	520	360	100
		M6	E32-CC200 2M	2,100	900	600	180
			E32-LD11 2M	1,290	540	370	110
			E32-LD11R 2M	1,260	520	360	100

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

### Cylindrical Models

Sensing method	Size	Sensing direction	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	1 dia.	Top-view	E32-T223R 2M	670	370	220	60
	1.5 dia.		E32-T22B 2M	1,020	600	330	90
	3 dia.		E32-T12R 2M	3,000	1,500	1,050	280
Reflective	3 dia.	Side-view	E32-T14LR 2M	1,120	670	390	100
	1.5 dia.	Top-view	E32-D22B 2M	210	90	60	16
	1.5 dia. + 0.5 dia.		E32-D43M 1M	42	18	12	4
	3 dia.		E32-D22R 2M	210	90	60	16
	3 dia.		E32-D221B 2M	450	210	130	40
	3 dia. + 0.8 dia.		E32-D32L 2M	1,050	450	300	90
	3 dia. + 0.8 dia.		E32-D33 2M	100	45	30	8

### Flat Models

Sensing method	Sensing direction	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Top-view	E32-T15XR 2M	3,000	1,500	1,050	280
	Side-view	E32-T15YR 2M	1,120	670	390	100
	Flat-view	E32-T15ZR 2M				
Reflective	Top-view	E32-D15XR 2M	1,260	520	360	100
	Side-view	E32-D15YR 2M	300	150	78	24
	Flat-view	E32-D15ZR 2M				

**Sleeve Models**

Sensing method	Sensing direction	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Side-view	E32-T24R 2M	250	150	75	20
		E32-T24E 2M	670	370	220	60
	Top-view	E32-T33 1M	220	130	75	20
		E32-T21-S1 2M	760	450	250	68
		E32-TC200BR 2M	3,000	1,500	1,050	280
Reflective	Side-view	E32-D24R 2M	100	45	30	8
		E32-D24-S2 2M	180	79	67	14
	Top-view	E32-D43M 1M	42	18	12	4
		E32-D331 2M	21	9	6	2
		E32-D33 2M	100	45	30	8
		E32-D32-S1 0.5M	94	40	27	7
		E32-D31-S1 0.5M	210	90	60	16
		E32-DC200F4R 2M	370	160	100	30
		E32-D22-S1 2M	1,260	520	360	100
		E32-D21-S3 2M	370	160	100	30
		E32-DC200BR 2M				
		E32-D25-S3 2M				

**Small-spot, Reflective Models**

Type	Spot diameter	Center distance (mm)	Models	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Variable spot	0.1 to 0.6 dia.	6 to 15	E32-C42 1M + E39-F3A	Spot diameter of 0.1 to 0.6 mm at 6 to 15 mm.			
	0.3 to 1.6 dia.	10 to 30	E32-C42 1M + E39-F17	Spot diameter of 0.3 to 1.6 mm at 10 to 30 mm.			
Parallel light	4 dia.	0 to 20	E32-C31 2M + E39-F3C	Spot diameter of 4 mm max. at 0 to 20 mm.			
			E32-C31N 2M + E39-F3C				
Integrated lens	0.1 dia.	5	E32-C42S 1M	Spot diameter of 0.1 mm at 5 mm.			
	6 dia.	50	E32-L15 2M	Spot diameter of 6 mm at 50 mm.			
Small-spot	0.1 dia.	7	E32-C41 1M + E39-F3A-5	Spot diameter of 0.1 mm at 7 mm.			
	0.5 dia.		E32-C31 2M + E39-F3A-5	Spot diameter of 0.5 mm at 7 mm.			
	E32-C31N 2M + E39-F3A-5						
	0.2 dia.	17	E32-C41 1M + E39-F3B	Spot diameter of 0.2 mm at 17 mm.			
	0.5 dia.		E32-C31 2M + E39-F3B	Spot diameter of 0.5 mm at 17 mm.			
	E32-C31N 2M + E39-F3B						
	3 dia.	50	E32-CC200 2M + E39-F18	Spot diameter of 3 mm at 50 mm.			
			E32-C11N 2M + E39-F18				

## High-power Beam Models

Type	Sensing direction	Aperture angle	Models	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam models with integrated lens	Right-angle	15°	E32-LT11N 2M	4,000 *2	4,000 *2	3,450	920
	Top-view	10°	E32-T17L 10M	20,000 *1	20,000 *1	20,000 *1	8,000
		15°	E32-LT11 2M	4,000 *2	4,000 *2	4,000 *2	1,080
	Side-view	30°	E32-T14 2M	4,000 *2	4,000 *2	4,000 *2	1,800
Through-beam models with lenses	Right-angle	12°	E32-T11N 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	2,000
		6°	E32-T11N 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	3,600
	Top-view	12°	E32-T11R 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	2,000
		6°	E32-T11R 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	3,600
	Side-view	60°	E32-T11R 2M + E39-F2	2,170	1,200	750	200
	Top-view	12°	E32-T11 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	1,860
		6°	E32-T11 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	4,000 *2
	Side-view	60°	E32-T11 2M + E39-F2	3,450	1,980	1,290	320
	Top-view	12°	E32-T51R 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	1,500
		6°	E32-T51R 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	4,000 *2
	Side-view	60°	E32-T51R 2M + E39-F2	2,100	1,080	750	200
	Top-view	12°	E32-T81R-S 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	1,000
		6°	E32-T81R-S 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	1,800
	Side-view	60°	E32-T81R-S 2M + E39-F2	1,500	820	540	140
	Top-view	12°	E32-T61-S 2M + E39-F1	4,000 *2	4,000 *2	4,000 *2	1,800
		6°	E32-T61-S 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	3,100
	Side-view	60°	E32-T61-S 2M + E39-F2	2,520	1,350	900	240
	Top-view	12°	E32-T51 2M + E39-F1-33	4,000 *2	4,000 *2	3,450	1,400
		6°	E32-T51 2M + E39-F16	4,000 *2	4,000 *2	4,000 *2	4,000 *2
Reflective models with integrated lens	Top-view	4°	E32-D16 2M	40 to 4,200	40 to 2,100	40 to 1,350	40 to 720

\*1. The fiber length is 10 m on each side, so the sensing distance is given as 20,000 mm.

\*2. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

## Narrow View Models

Sensing method	Sensing direction	Aperture angle	Models	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Side-view	1.5°	E32-A03 2M	4,000 *1	2,670	1,800	500
			E32-A03-1 2M				
		3.4°	E32-A04 2M	1,920	1,020	670	200
			E32-T24SR 2M				
		4°	E32-T24S 2M	4,000 *1	3,300	2,190	580
			E32-T22S 2M	4,000 *1	3,900	2,610	700
			E32-T22S 2M	4,000 *1	4,000 *1	3,750	1,000

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

## Models for Detection without Background Interference

Sensing method	Sensing direction	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Limited-reflective	Flat-view	E32-L16-N 2M	0 to 15			0 to 12
		E32-L24S 2M	0 to 4			
	Side-view	E32-L25L 2M	5.4 to 9 (center 7.2)			

## Transparent Object Detection (Retro-reflective Models)

Sensing method	Feature	Size	Models	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Retro-reflective	Film detection	M3	E32-C31 2M + E39-F3R + E39-RP37	370		300	---
	Square	---	E32-R16 5M	150 to 1,500			
	Threaded	M6	E32-R21 2M	10 to 370			10 to 250
	Hex-shaped		E32-LR11NP 2M + E39-RP1	2,020	1,800	1,500	550

### Transparent Object Detection (Limited-reflective Models)

Sensing method	Feature	Sensing direction	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Limited-reflective	Small size	Flat-view	E32-L24S 2M	0 to 4			
	Standard		E32-L16-N 2M	0 to 15		0 to 12	
	Glass substrate alignment, 70°C		E32-A08 2M	10 to 20		---	
	Standard/long-distance		E32-A12 2M	12 to 30		---	
	Side-view form	Side-view	E32-L25L 2M	5.4 to 9 (center 7.2)			
	Glass substrate mapping, 70°C	Top-view	E32-A09 2M	15 to 38		---	

### Chemical-resistant, Oil-resistant Models

Sensing method	Type	Sensing direction	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Oil-resistant	Right-angle	E32-T11NF 2M	4,000 *1	4,000 *1	4,000 *1	2,200
	Chemical/oil-resistant	Top-view	E32-T12F 2M	4,000 *1	4,000 *1	4,000 *1	1,600
			E32-T11F 2M	4,000 *1	4,000 *1	3,900	1,000
	Chemical/oil-resistant at 150°C	Side-view	E32-T14F 2M	2,100	1,200	750	200
Reflective	Semiconductors: Cleaning, developing, and etching; 60°C	Top-view	E32-L11FP 5M	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 19 to 31 mm from center of mounting hole A (Recommended sensing distance: 22 mm)			
	Semiconductors: Resist stripping; 85°C		E32-L11FS 5M	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 32 to 44 mm from center of mounting hole A (Recommended sensing distance: 35 mm)			
	Chemical/oil-resistant		E32-D12F 2M	---	280	190	60
	Chemical-resistant cable		E32-D11U 2M	1,260	520	360	100

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

\*2. Even if there is no sensing object, the Sensor will detect light that is reflected by the fluororesin.

### Bending-resistant Models

Sensing method	Size	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	1.5 dia.	E32-T22B 2M	1,020	600	330	90
	M3	E32-T21 2M				
	M4	E32-T11 2M	3,750	2,020	1,350	360
	Square	32-T25XB 2M	750	450	250	70
Reflective	1.5 dia.	E32-D22B 2M	210	90	60	16
	M3	E32-D21 2M				
	3 dia.	E32-D221B 2M	450	210	130	40
	M4	E32-D21B 2M				
	M6	E32-D11 2M	1,260	520	360	100
	Square	E32-D25XB 2M	360	150	90	30

### Heat-resistant Models

Sensing method	Heat-resistant temperature	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	100°C	E32-T51R 2M	2,400	1,200	840	225
	150°C	E32-T51 2M	4,000 *1	2,250	1,500	400
	200°C	E32-T81R-S 2M	1,500	820	540	140
	350°C	E32-T61-S 2M	2,520	1,350	900	240
Reflective	100°C	E32-D51R 2M	1,000	420	280	80
	150°C	E32-D51 2M	1,680	670	480	144
	200°C	E32-D81R-S 2M	630	270	180	54
	300°C	E32-A08H2 2M	10 to 20			---
		E32-A09H2 2M	20 to 30 (center 25)			---
	350°C	E32-D611-S 2M	630	270	180	54
		E32-D61-S 2M				
	400°C	E32-D73-S 2M	420	180	120	36

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

## Area Detection Models

Sensing method	Type	Sensing width	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Area	11 mm	E32-T16PR 2M	4,000 *1	2,550	1,680	440
			E32-T16JR 2M	4,000 *1	2,250	1,440	380
	Reflective	30 mm	E32-T16WR 2M	4,000 *1	3,900	2,550	680
Reflective	Array	11 mm	E32-D36P1 2M	1,050	450	300	90

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

## Liquid-level Detection Models

Sensing method	Tube diameter	Feature	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Tube-mounting	3.2, 6.4, or 9.5 dia	Stable residual quantity detection	E32-A01 5M	Applicable tube: Transparent tube with a diameter of 3.2, 6.4, or 9.5 mm, Recommended wall thickness: 1 mm			
	8 to 10 dia	Mounting at multiple levels	E32-L25T 2M	Applicable tube: Transparent tube with a diameter of 8 to 10 mm, Recommended wall thickness: 1 mm			
	No restrictions	Large tubes	E32-D36T 5M	Applicable tube: Transparent tube (no restrictions on diameter)			
Liquid contact (heat-resistant up to 200°C)	---	---	E32-D82F1 4M	Liquid-contact type			

## Vacuum-resistant Models

Sensing method	Heat-resistant temperature	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	120°C	E32-T51V 1M	1,080	600	390	100
		E32-T51V 1M + E39-F1V	2,000 *1	2,000 *1	2,000 *1	520
	200°C	E32-T84SV 1M	2,000 *1	1,420	960	260

\*1. The fiber length is 1 m on each side, so the sensing distance is given as 2,000 mm.

## Models for FPD, Semiconductors, and Solar Cells

Sensing method	Application	Operating temperature	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Limited-reflective	Glass presence detection	70°C	E32-L16-N 2M	0 to 15			
			E32-A08 2M	10 to 20			
	Glass substrate alignment	300°C	E32-A08H2 3M	12 to 30			
		70°C	E32-A12 2M	15 to 38			
	Glass substrate mapping	300°C	E32-A09 2M	20 to 30 (center 25)			
		60°C	E32-L11FP 5M	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 19 to 31 mm from center of mounting hole A (Recommended sensing distance: 22 mm)			
Through-beam	Wafer mapping	85°C	E32-L11FS 5M	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 32 to 44 mm from center of mounting hole A (Recommended sensing distance: 35 mm)			
			E32-A03 2M	4,000 *1	2,670	1,800	500
			E32-A03-1 2M	1,920	1,020	670	200
			E32-A04 2M	4,000 *1	3,300	2,190	580
			E32-T24SR 2M	4,000 *1	3,900	2,610	700
			E32-T24S 2M	4,000 *1			

\*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

## Infrared models

### Threaded Models

Sensing method	Sensing direction	Size	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Right-angle	M4	E32-T11N 2M	280	190	130	55
	Straight		E32-T11R 2M				
Reflective	Straight	M3	E32-C31 2M	50	37	25	8.5
			E32-D11R 2M	120	90	60	21
		M6	E32-CC200 2M	200	150	100	35

### Cylindrical Models

Sensing method	Size	Sensing direction	Model	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	3 dia.	Top-view	E32-T12R 2M	280	190	130	55
		Side-view	E32-T14LR 2M				
Reflective	3 dia.	Top-view	E32-D32L 2M	100	75	50	17

### Flat Models

Sensing method	Sensing direction	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Top-view	E32-T15XR 2M	280	190	130	55
	Side-view	E32-T15YR 2M				
	Flat-view	E32-T15ZR 2M	100	75	80	21
Reflective	Top-view	E32-D15XR 2M	120	90	60	21
	Side-view	E32-D15YR 2M				
	Flat-view	E32-D15ZR 2M	28	20	13	5

### Sleeve Models






Sensing method	Sensing direction	Model	Sensing distance (mm)			
			Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam	Top-view	E32-TC200BR 2M	280	190	130	55
Reflective	Top-view	E32-DC200BR 2M	120	90	60	21

### High-power Beam Models

Type	Sensing direction	Aperture angle	Models	Sensing distance (mm)			
				Giga mode	Standard mode	High-speed mode	Super-high-speed mode
Through-beam models with integrated lens	Side-view	30°	E32-T14 2M	1800	1200	820	360





## I/O Circuit Diagrams

## NPN Output

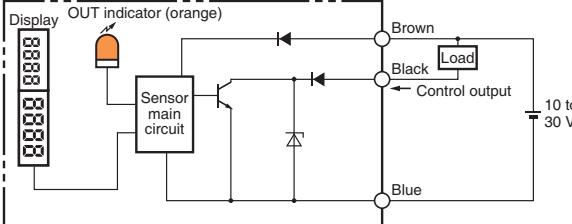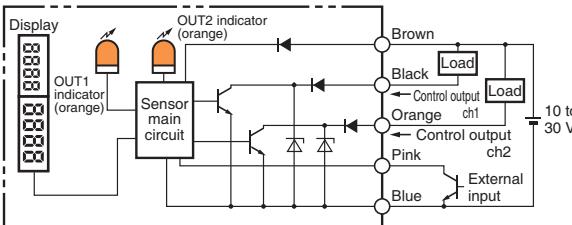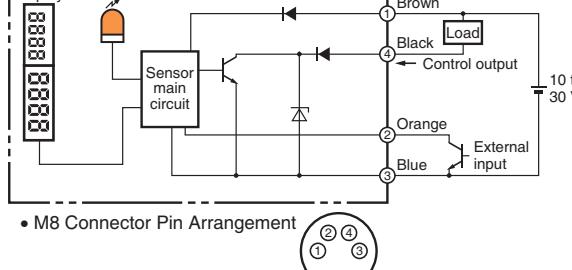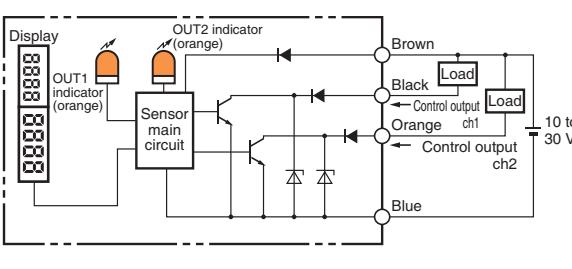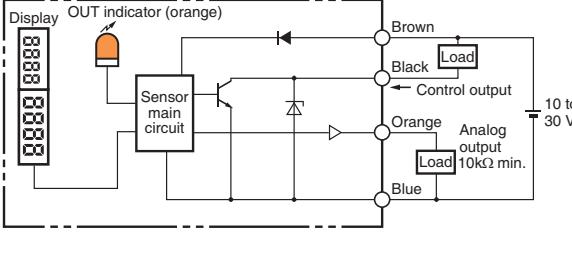Model	Operation mode	Timing chart	L/D indicator	Output circuit
E3NX-FA11 E3NX-FA6 E3NX-FA11-5 E3NX-FAH11 E3NX-FAH6	Light-ON	Incident light No incident light OUT indicator (orange) Lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black leads)		
	Dark-ON	Incident light No incident light OUT indicator (orange) Not lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black leads)		
E3NX-FA21	Light-ON	ch1/ Incident light ch2 No incident light OUT indicator (orange) Lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)		
	Dark-ON	ch1/ Incident light ch2 No incident light OUT indicator (orange) Not lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)		
E3NX-FA7 E3NX-FA24	Light-ON	Incident light No incident light OUT indicator (orange) Lit Output transistor OFF Load Operate (e.g., relay) Reset (Between brown and black leads)		
	Dark-ON	Incident light No incident light OUT indicator (orange) Not lit Output transistor OFF Load Operate (e.g., relay) Reset (Between brown and black leads)		
E3NX-FA7TW	Light-ON	ch1/ Incident light ch2 No incident light OUT indicator (orange) Lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)		
	Dark-ON	ch1/ Incident light ch2 No incident light OUT indicator (orange) Not lit Output transistor OFF Load Operate (e.g., relay) Reset (Between brown and black (orange) leads)		
E3NX-FA11AN	Light-ON	Incident light No incident light OUT indicator (orange) Lit Output transistor ON Load Operate (e.g., relay) Reset (Between brown and black leads)		
	Dark-ON	Incident light No incident light OUT indicator (orange) Not lit Output transistor OFF Load Operate (e.g., relay) Reset (Between brown and black leads)		

## PNP Output

Model	Operation mode	Timing chart	L/D indicator	Output circuit
E3NX-FA41 E3NX-FA8 E3NX-FAH41 E3NX-FAH8	Light-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		
	Dark-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		
E3NX-FA51	Light-ON	ch1/ Incident light ch2 No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)		
	Dark-ON	ch1/ Incident light ch2 No incident light OUT indicator Lit (orange) Not lit Outputs ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)		
E3NX-FA9 E3NX-FA54	Light-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		
	Dark-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		
E3NX-FA97W E3NX-FA54TW	Light-ON	ch1/ Incident light ch2 No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)		
	Dark-ON	ch1/ Incident light ch2 No incident light OUT indicator Lit (orange) Not lit Outputs ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black (orange) leads)		
E3NX-FA41AN	Light-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		
	Dark-ON	Incident light No incident light OUT indicator Lit (orange) Not lit Output ON transistor OFF Load Operate (e.g., relay) Reset (Between blue and black leads)		

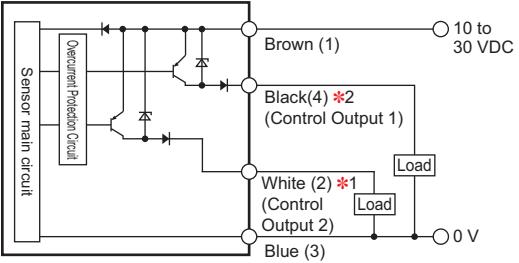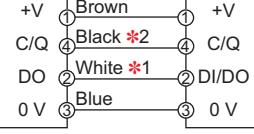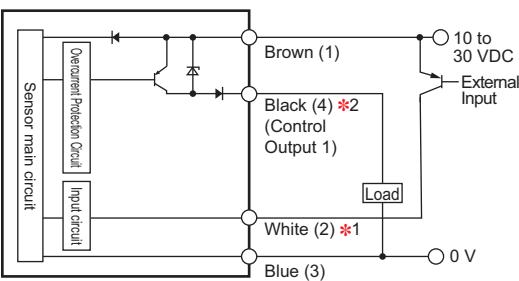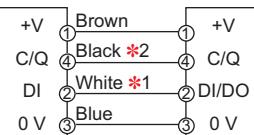
Model	Output circuit	
	Standard I/O mode (SIO mode)	IO-Link Communication mode (COM mode)
E3NX-FA51-IL3 E3NX-FA54-IL3	Using Pin2 (white wire) as output	Using Pin2 (white wire) as output
		
	Using Pin2 (white wire) as external input	Using Pin2 (white wire) as external input
		
Connector Pin Arrangement		
M8 Connector		
		

**Note:** (1), (2), (3) and (4) are pin terminals of M8 Connector Type.

\*1. Pin 2 (white wire) is assigned from output 2 and external input.

\*2. The assignment for pin 4 (black wire) switches depending on the setting on the IO-Link master side. When IO-Link is not connected, output 1 is assigned.


## Plug (Sensor I/O Connector)

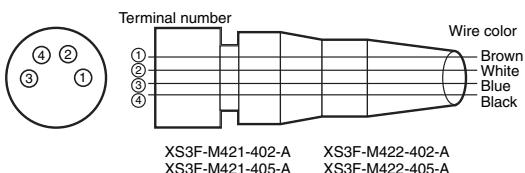


Wire color	Connection pin	Application
Brown	1	Power supply (+V)
White	2	External input / Output
Blue	3	Power supply (0 V)
Black	4	Output

## Nomenclature

**E3NX-FA11/FA41/FA6/FA8/FA7/FA9/FA24/FA54/  
FA11-5/FAH11/FAH41/FAH6/FAH8/FA11AN/FA41AN**

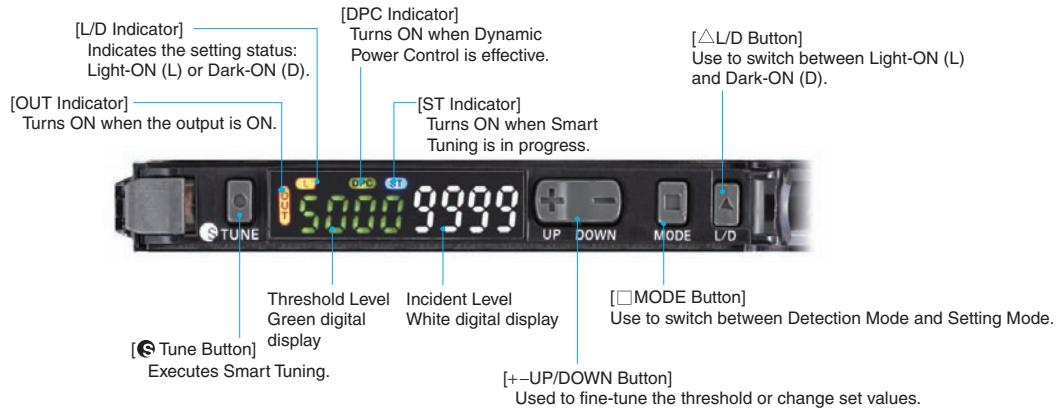

**E3NX-FA21/FA51/FA7TW/FA9TW/FA54TW/FA51-IL3/FA54-IL3/FA10/FA40/FA0/FAH0**

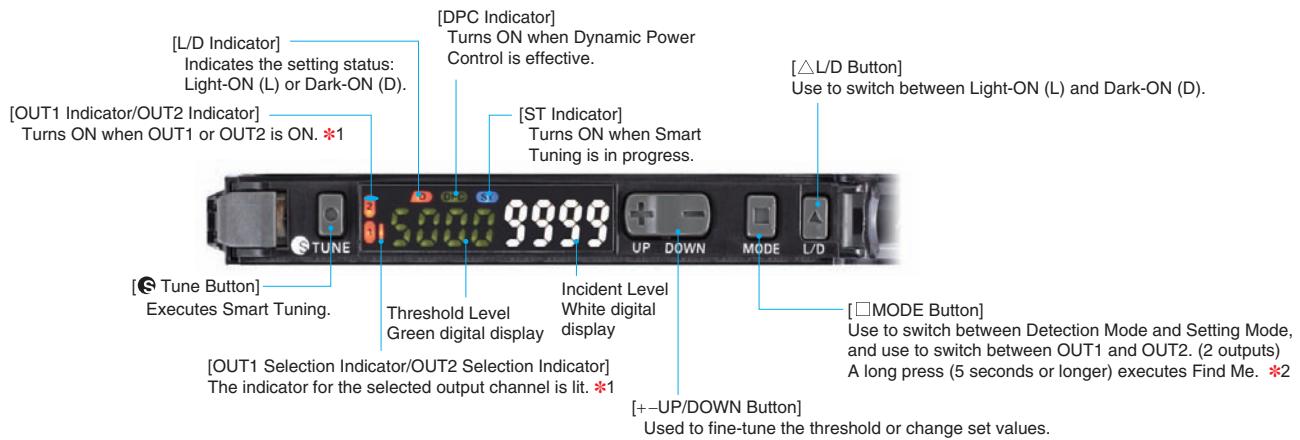

\*1. Only OUT1 turns ON for output.

\*2. Advanced function IO-Link only.

## Safety Precautions

Be sure to read the precautions for all models in the website at: <http://www.ia.omron.com/>.

### Warning Indications

	<b>Warning level</b> Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death. Additionally, there may be significant property damage.
<b>Precautions for Safe Use</b>	Supplementary comments on what to do or avoid doing, to use the product safely.
<b>Precautions for Correct Use</b>	Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction or undesirable effect on product performance.

### Meaning of Product Safety Symbols

	<b>General prohibition</b> Indicates the instructions of unspecified prohibited action.
	<b>Caution, fire</b> Indicates the possibility of fire under specific conditions.
	<b>Caution, explosion</b> Indicates the possibility of explosion under specific conditions.

### ⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Do not use the product with voltage in excess of the rated voltage.

Excess voltage may result in malfunction or fire.




Never use the product with an AC power supply. Otherwise, explosion may result.



<b>Precautions for Safe Use</b>	
The following precautions must be observed to ensure safe operation of the Amplifier Unit. Doing so may cause damage or fire.	
1.	Do not install the product in the following locations.
	<ul style="list-style-type: none"> <li>Locations subject to direct sunlight</li> <li>Locations subject to condensation due to high humidity</li> <li>Locations subject to corrosive gas</li> <li>Locations subject to vibration or mechanical shocks exceeding the rated values</li> <li>Locations subject to exposure to water, oil, chemicals</li> <li>Locations subject to stream</li> <li>Locations subjected to strong magnetic field or electric field</li> </ul>
2.	Do not use the product in environments subject to flammable or explosive gases.
3.	Do not use the product in any atmosphere or environment that exceeds the ratings.
4.	To secure the safety of operation and maintenance, do not install the product close to high-voltage devices and power devices.
5.	High-voltage lines and power lines must be wired separately from the product. Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
6.	Do not apply any load exceeding the ratings. Otherwise, damage or fire may result.
7.	Do not short the load. Otherwise, damage or fire may result.
8.	Connect the load correctly.
9.	Check that the setting for input/output mode is correct before connecting the load.
10.	Wire carefully so as not to make wiring mistakes, such as the wrong power polarity. If there are any unused input/output wires, insulate them.
11.	If you use two or more units connected, always connect all of the units to the same power supply or master unit and turn on the power of them at the same time. Functions for connected units could be affected.
12.	Do not use the product if the case is damaged.
13.	Burn injury may occur. The product surface temperature rises depending on application conditions, such as the ambient temperature and the power supply voltage. Attention must be paid during operation or cleaning.
14.	When changing the settings (including initialization) and switching the input/output, be sure to check the safety, such as by stopping the equipment and removing the connected load.
15.	Be sure to turn off the power supply before connecting or disconnecting wires.
16.	Do not attempt to disassemble, repair, or modify the product in any way.
17.	When disposing of the product, treat it as industrial waste.
18.	Do not use the Sensor in water, rainfall, or outdoors.
19.	Use the product in the IP54 enclosure.
20.	UL Standard Certification Applicable Models: E3NX-FA11/21/41/51/51-IL3/54-IL3 Only the sensors with Enhanced UL Certification Mark are certified by UL. They are intended to be supplied by a "Class 2 circuit". When used in United States and Canada, Please use the same Class 2 source for input and output. The overcurrent protection current rating is 2A max. They were evaluated as Open type and shall be installed within a enclosure.

### Precautions for Correct Use

1. Be sure to mount the unit to the DIN track until it clicks.
2. When using the Amplifier Units with Wire-saving Connectors, attach the protective stickers (provided with E3X-CN-series Connectors) on the unused power pins to prevent electrical shock and short circuiting.  
When using the Amplifier Units with Connectors for Communications Units, attach the protective caps (provided with E3NW-series Sensor Communications Unit).

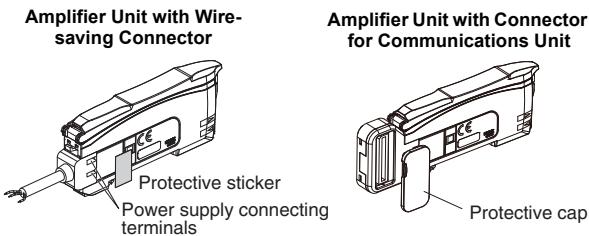

3. The length for the cable extension must be 30 m or less (or less than 10 m for S-mark certified models). Be sure to use a cable of at least 0.3 mm<sup>2</sup> for extension. The power voltage must be 24 to 30 V when connecting amplifier units with extension cable and wire-saving connector. When using the product via IO-Link communication, ensure that the length of the wires between the master unit and sensor is 20 m or less.
4. Do not apply the forces on the cord exceeding the following limits. Do not use the product while the cord is pinched.  
Pull: 40N; torque: 0.1N·m; pressure: 20N; bending: 29.4N
5. Do not apply excessive force such as tension, compression or torsion to the Amplifier Unit with the Fiber Unit fixed to the Amplifier Unit.
6. Always keep the protective cover in place when using the Amplifier Unit. Not doing so may cause malfunction.
7. It may take time until the received light intensity and measured value become stable immediately after the power is turned on depending on use environment.
8. The product is ready to operate 200 ms after the power supply is turned ON.
9. The Mobile Console E3X-MC11, E3X-MC11-SV2 and E3X-MC11-S cannot be connected.
10. The mutual interference prevention function does not work when in combination with E3C/E2C/E3X.
11. When multiple amplifier units are connected with an IO-Link master unit, specify the channel number settings manually. If they are set automatically, the units cannot be recognized correctly and the mutual interference prevention function may not work.  
(Advanced function IO-Link only.)
12. If the unit receives excessive sensor light, the mutual interference prevention function may not work properly, resulting in malfunction of the unit. In such case, increase the threshold.
13. Standard models and Advanced models  
The Sensor Communication Unit E3X-DRT21-S, E3X-CRT, E3X-ECT and E3NW cannot be connected.  
Model for Sensor Communication Unit (E3NX-FA0)  
The Sensor Communication Unit E3NW can be connected.  
E3X-DRT21-S, E3X-CRT, E3X-ECT cannot be connected.
14. If you notice an abnormal condition such as a strange odor, extreme heating of the unit, or smoke immediately stop using the product, turn off the power, and consult your dealer.
15. Do not use thinner, benzene, acetone, and lamp oil for cleaning.
16. The amplifier unit uses EEPROM to save the configuration information. If memory rewrite count exceeds the limit (1,000,000 times), the memory error appears, in which case you must replace the amplifier unit. Memory data rewrite occurs when you perform zero reset, threshold change, tuning and so on.
17.  Dispose in accordance with applicable regulations.

# E3NX-FA

## Dimensions

(Unit: mm)  
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

### Fiber Amplifier Units


#### Pre-wired Amplifier Units

**E3NX-FA□1(-5)**

**E3NX-FA51-IL3**


**E3NX-FAH□1**

**E3NX-FA□AN**

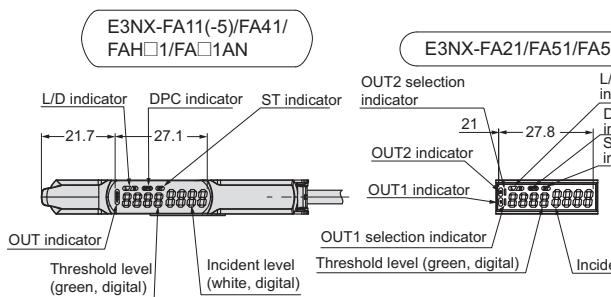

#### \*Cable Specifications

Model	Outer diameter	No. of conductors	Others
E3NX-FA11(-5)	3		Conductor cross-section: 0.2 mm <sup>2</sup>
E3NX-FA41	4		Insulator dia.: 0.9 mm
E3NX-FA51-IL3	3		Standard cable length: 2 m
E3NX-FAH□1	4		Minimum bending radius: 12 mm
E3NX-FA□1AN			
E3NX-FA21			
E3NX-FA51	5		

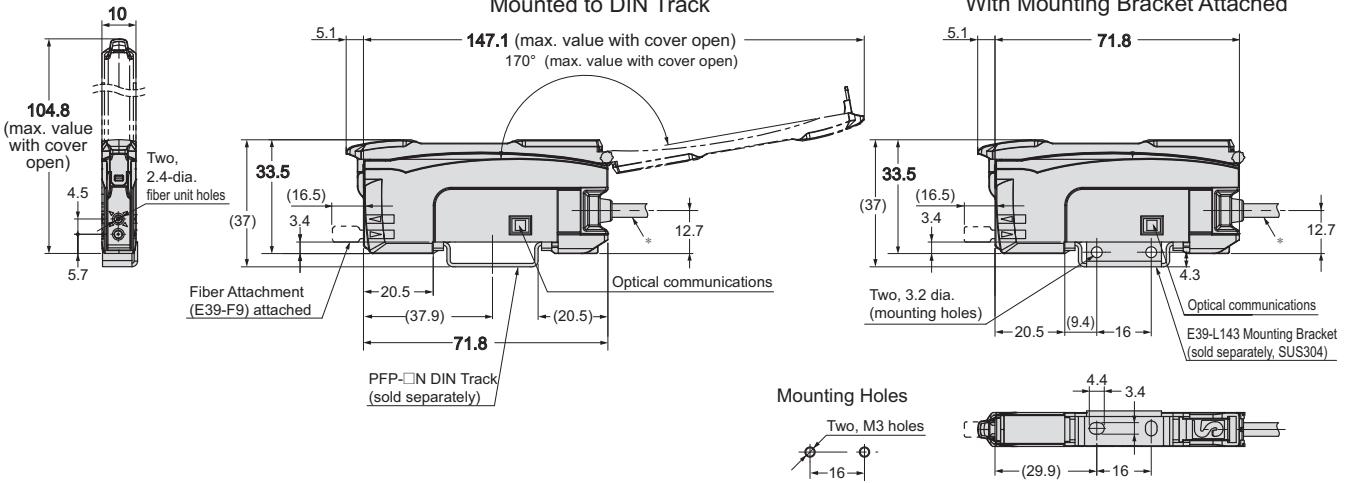

#### Amplifier Units with Wire-saving Connectors

**E3NX-FA6**


**E3NX-FA7(TW)**

**E3NX-FA8**

**E3NX-FA9(TW)**

**E3NX-FAH6**


**E3NX-FAH8**

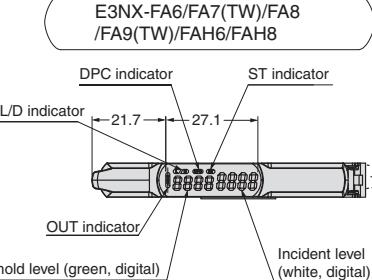

#### E3NX-FA7TW/FA9TW

#### \*Cable Specifications

Model	Outer diameter	No. of conductors
E3X-CN12	2.6 dia.	1
E3X-CN22		2
E3X-CN11	4.0 dia.	3
E3X-CN21		4

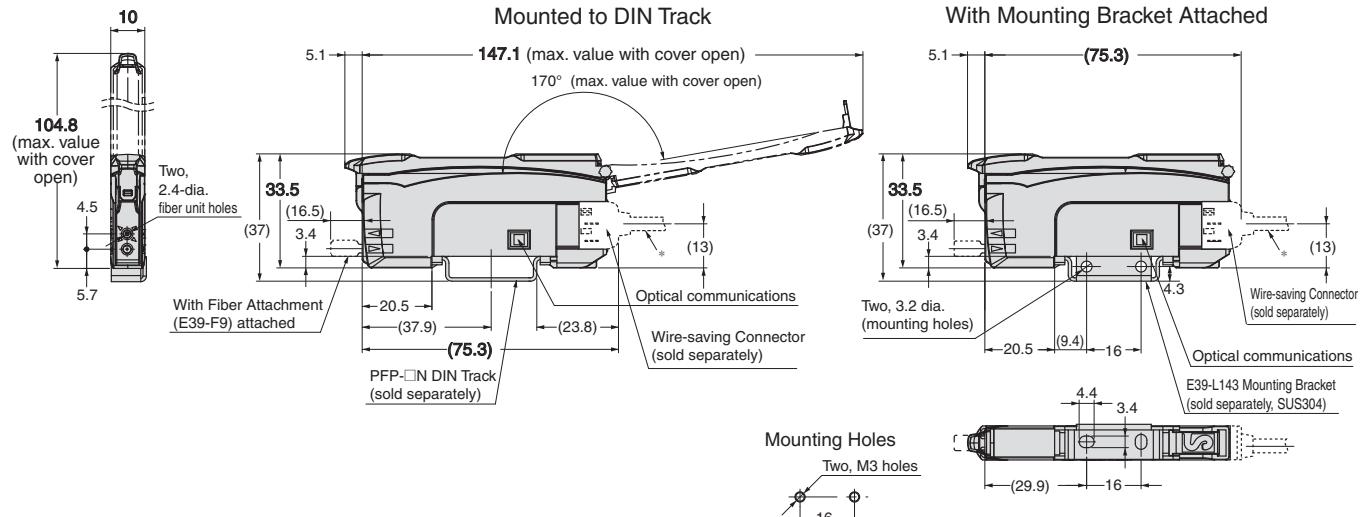


## Amplifier Units with M8 Connectors

E3NX-FA24

E3NX-FA54


E3NX-FA54TW

E3NX-FA54-IL3

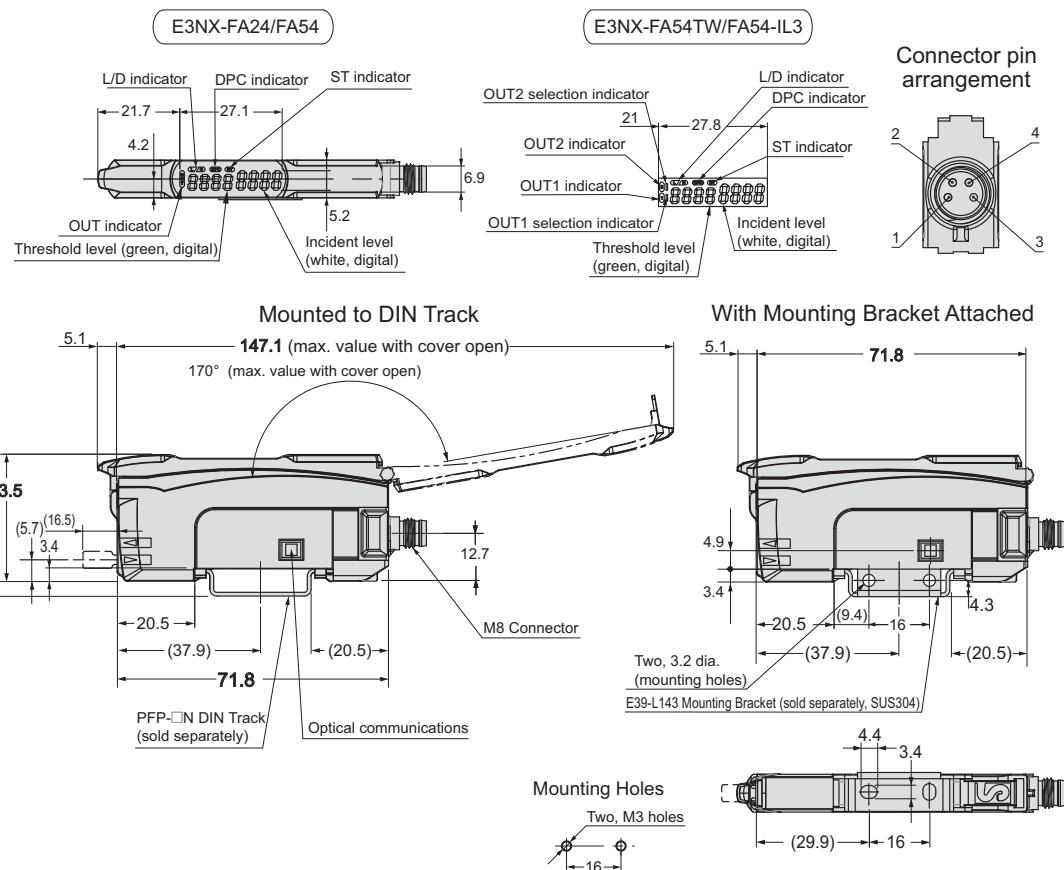

## Amplifier Unit with Connector for Sensor Communications Unit


E3NX-FA0/FAH0

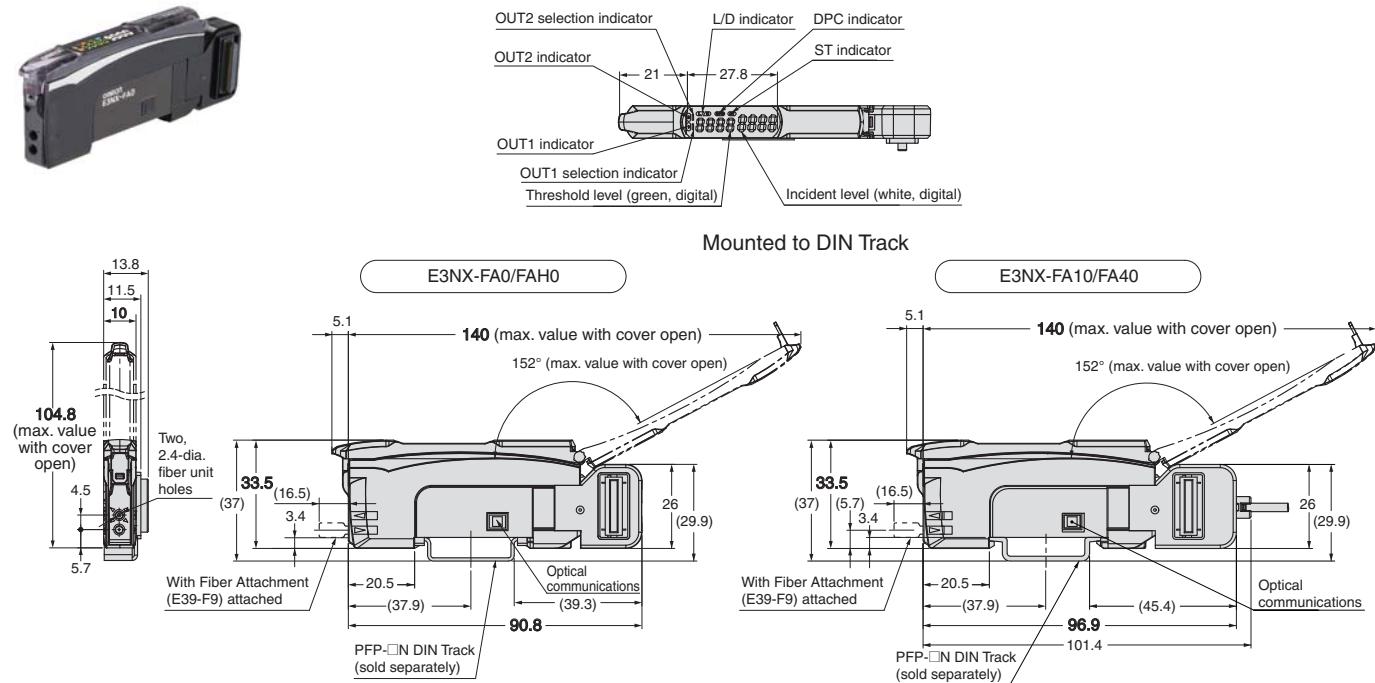

## Accessories (Sold Separately)


### Wire-saving Connectors

**Master Connector**  
**E3X-CN11**  
**E3X-CN21**

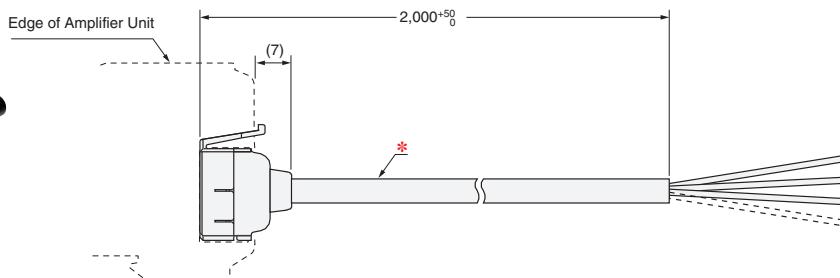

\* E3X-CN11: 4-dia. cable with 3 conductors, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulator diameter: 1.1 mm)  
E3X-CN21: 4-dia. cable with 4 conductors, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulator diameter: 1.1 mm)


**Slave Connector**  
**E3X-CN12**  
**E3X-CN22**

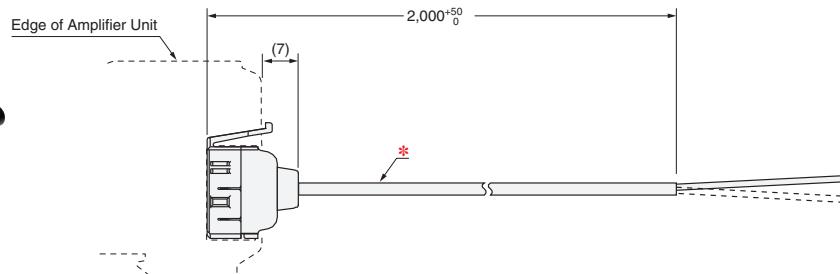


\* E3X-CN12: 2.6-dia. cable with 1 conductor, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulator diameter: 1.1 mm)  
E3X-CN22: 4-dia. cable with 2 conductors, Standard cable length: 2 m (Conductor cross-section: 0.2 mm<sup>2</sup> (AWG24), Insulator diameter: 1.1 mm)

### Sensor I/O Connectors

**Straight**  
**XS3F-M421-40□-A**

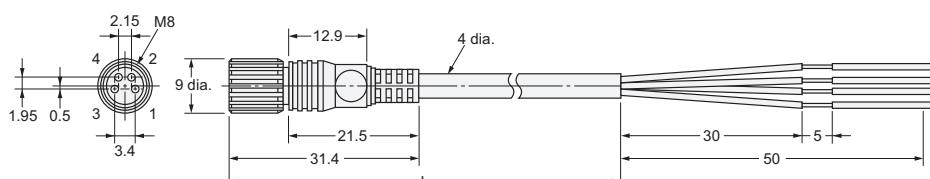



**L-shaped**  
**XS3F-M422-40□-A**

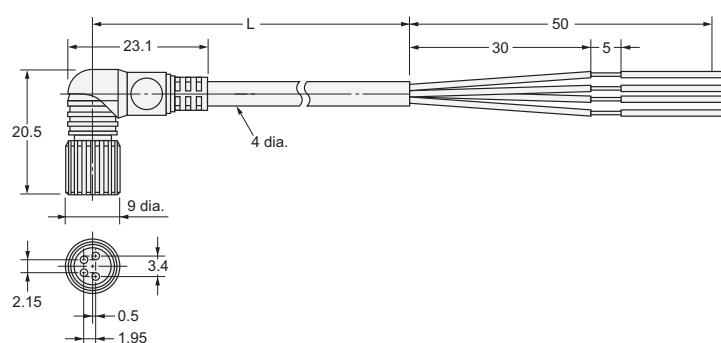



### Mounting Bracket E39-L143



Material: Stainless steel (SUS304)

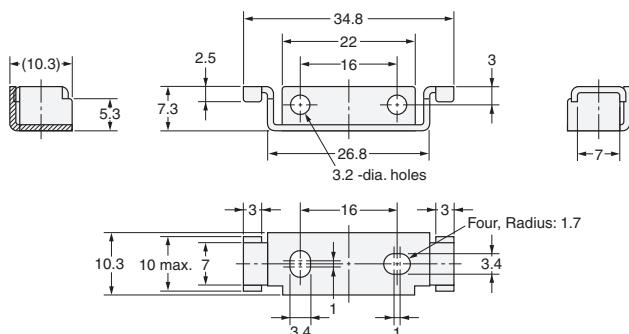



### DIN Track PFP-100N PFP-50N

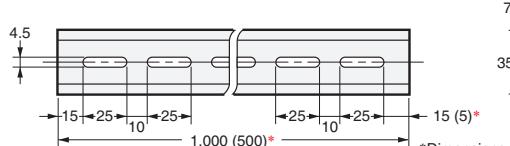

\*Dimensions in parentheses are for the PFP-50N.



Material: Aluminum

### PFP-100N2

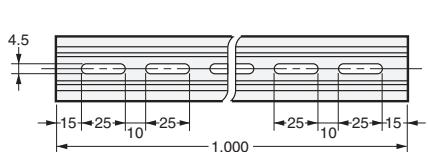

Material: Aluminum

### End Plate PFP-M

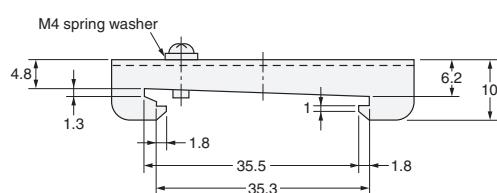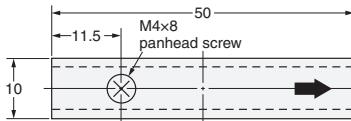

Materials: Iron, zinc plating

## MEMO

# Terms and Conditions Agreement

## **Read and understand this catalog.**

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## **Warranties.**

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

## **Limitation on Liability: Etc.**

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

## **Suitability of Use.**

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **Programmable Products.**

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

## **Performance Data.**

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

## **Change in Specifications.**

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

## **Errors and Omissions.**

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

# Introduction to Fiber Units

Build-in Lens Series

**Hex Shape**  
**E32-LT11N**  
**E32-LD11N**



**Flat Models**  
**E32-LT35Z**



**Straight Type**  
**E32-LT11 (R)**  
**E32-LD11 (R)**



**Oil-resistant**  
**E32-T11NFS**  
**E32-T11NF**



## Fiber Sensor Best Selection Catalog

Refer to the Fiber Sensor Best Selection Catalog for information on the above Fiber Units and detailed information on the E3NX-FA.

Cat. No. E418



### Compliance with International Standards



\* UL certified model: E3NX-FA11/21/41/51/51-IL3/54-IL3  
EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.  
CompoNet™ is a registered trademark of the ODVA.  
CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.  
Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.  
Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.  
The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

**Note: Do not use this document to operate the Unit.**

**OMRON Corporation Industrial Automation Company**

**Kyoto, JAPAN**

**Contact : [www.ia.omron.com](http://www.ia.omron.com)**

**Regional Headquarters**

**OMRON EUROPE B.V.**  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

**OMRON ASIA PACIFIC PTE. LTD.**  
438B Alexandra Road, #08-01/02 Alexandra  
Technopark, Singapore 119968  
Tel: (65) 6835-3011 Fax: (65) 6835-3011

**OMRON ELECTRONICS LLC**  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

**Authorized Distributor:**

©OMRON Corporation 2012-2026 All Rights Reserved.  
In the interest of product improvement, specifications are subject to change without notice.

**CSM\_10\_5**  
**Cat. No. E426-E1-07** 0126 (1212)